

# AC/DC 150W Enclosed Switching Power Supply

LM150-22Bxx, LM150-22Bxx-C, LM150-22Bxx-Q series

# MORNSUN®



## FEATURES

- Universal 165 - 264VAC or 180 - 370VDC Input voltage
- Accepts AC or DC input (dual-use of same terminal)
- Operating ambient temperature range: -30°C to +70°C
- Low standby power consumption, high efficiency
- High I/O isolation test voltage up to 4000VAC
- Low ripple & noise
- Output short circuit, over-current, over-voltage, over-temperature protection
- IEC/EN/UL62368, EN60335, GB4943 safety approved
- Over-voltage class III (designed to meet EN61558)
- Operating altitude up to 5000m

UL US CE CCC CB RoHS



LM150-22Bxx series is one of Mornsun's enclosed AC-DC switching power supply. It features AC input and at the same time accepts DC input voltage, cost-effective, low no load power consumption, high efficiency, high reliability and double or reinforced insulation. These converters offer excellent EMC performance and meet IEC/EN61000-4, CISPR32/EN55032, UL/EN/IEC62368, EN60335, GB4943 standards and they are widely used in areas of industrial, LED, street light control, electricity, security, telecommunications, smart home etc.

## Selection Guide

Certification	Part No.*	Output Power (W)	Nominal Output Voltage and Current (Vo/Io)	Output Voltage Adjustable Range (V)	Efficiency at 230VAC (%) Typ.	Max. Capacitive Load (μF)
UL/CE/CCC/CB	LM150-22B12	150	12V/12.5A	10.2-13.8	86	10000
	LM150-22B15	150	15V/10A	13.5-18.0	87	6000
	LM150-22B24	156	24V/6.5A	21.6-28.8	88	2500
	LM150-22B36	154.8	36V/4.3A	32.4-39.6	88	1000
	LM150-22B48	158.4	48V/3.3A	43.2-52.8	89	600

Note: \*Use suffix "C" for terminal with protective cover and suffix "Q" for conformal coating.

## Input Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit
Input Voltage Range	AC input	165	--	264	VAC
	DC input	180	--	370	VDC
Input Voltage Frequency		47	--	63	Hz
Input Current	230VAC	--	--	2	A
Inrush Current	230VAC Cold start	--	60	--	
Leakage Current	240VAC	<0.75mA			
Hot Plug		Unavailable			

## Output Specifications

Item	Operating Conditions	Min.	Typ.	Max.	Unit	
Output Voltage Accuracy	Full load range	--	±1	--	%	
Line Regulation	Rated load	--	±0.5	--		
Load Regulation	0% - 100% load	--	±0.5	--		
Ripple & Noise*	20MHz bandwidth (peak-to-peak value)	12V/15V	--	--	150	mV
		24V/36V/48V	--	--	200	
Temperature Coefficient		--	±0.03	--	%/°C	
Minimum Load		0	--	--	%	
Stand-by Power Consumption		--	--	0.5	W	
Hold-up Time	230VAC	--	16	--	ms	

MORNSUN®

MORNSUN Guangzhou Science & Technology Co., Ltd.

2021.04.27-A/7

Page 1 of 4

MORNSUN Guangzhou Science & Technology Co., Ltd. reserves the copyright and right of final interpretation

Short Circuit Protection	Recovery time <5s after the short circuit disappear.	Hiccup, continuous, self-recovery
Over-current Protection		110% - 200% Io, self-recovery
Over-voltage Protection	12V	≤ 16VDC (Output voltage turn off, re-power on for recovery)
	15V	≤ 25VDC (Output voltage turn off, re-power on for recovery)
	24V	≤ 35VDC (Output voltage turn off, re-power on for recovery)
	36V	≤ 50VDC (Output voltage turn off, re-power on for recovery)
	48V	≤ 60VDC (Output voltage turn off, re-power on for recovery)
Over-temperature Protection		Output voltage turn off, self-recovery



Note: \*The "Tip and barrel method" is used for ripple and noise test, output parallel 47uF electrolytic capacitor and 0.1uF ceramic capacitor, please refer to Enclosed Switching Power Supply Application Notes for specific information.

General Specifications							
Item	Operating Conditions			Min.	Typ.	Max.	Unit
Isolation	Input - ⊕	Electric strength test for 1min., leakage current <10mA		2000	--	--	VAC
	Input - output			4000	--	--	
	Output - ⊕			1250	--	--	
Insulation Resistance	Input - ⊕	At 500VDC		50	--	--	MΩ
	Input - output			50	--	--	
	Output - ⊕			50	--	--	
Operating Temperature			-30	--	+70	℃	
Storage Temperature			-40	--	+85		
Storage Humidity	Non-condensing		10	--	95	%RH	
Operating Humidity			20	--	90		
Switching Frequency			--	65	--	kHz	
Power Derating	Operating temperature derating	12V output	+45℃ to +70℃	2.0	--	--	% / ℃
		Other outputs	+50℃ to +70℃	2.5	--	--	
Safety Standard				Meet UL/EN/IEC62368/EN60335/GB4943			
Safety Certification				UL/EN/IEC62368/EN60335/GB4943			
Safety Class				CLASS I			
MTBF	MIL-HDBK-217F@25℃			>300,000 h			



Mechanical Specifications	
Case Material	Metal (AL1100, SGCC)
Dimensions	159.00 x 97.00 x 30.00 mm
Weight	395g (Typ.)
Cooling Method	Free air convection

Electromagnetic Compatibility (EMC)				
Emissions	CE	CISPR32/EN55032 CLASS B		
	RE	CISPR32/EN55032 CLASS B		
	Harmonic current	IEC/EN61000-3-2 CLASS A (≤80% Load)		
Immunity	ESD	IEC/EN 61000-4-2	Contact ±6KV/Air ±8KV	perf. Criteria A
	RS	IEC/EN 61000-4-3	10V/m	perf. Criteria A
	EFT	IEC/EN 61000-4-4	±4KV	perf. Criteria A
	Surge	IEC/EN 61000-4-5	line to line ±2KV/line to ground ±4KV	perf. Criteria A
	CS	IEC/EN61000-4-6	10 Vr.m.s	perf. Criteria A
	Voltage dips, short interruptions and voltage variations immunity	IEC/EN61000-4-11	0%, 70%	perf. Criteria B

## Product Characteristic Curve

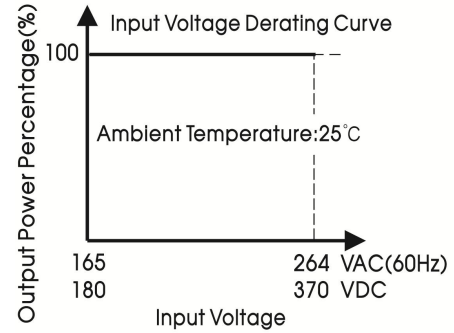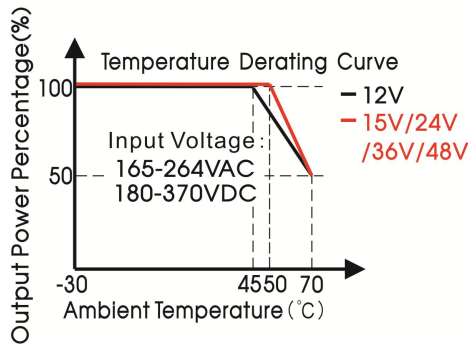


Note: This product is suitable for applications using natural air cooling; for applications in closed environment please consult Mornsun FAE.

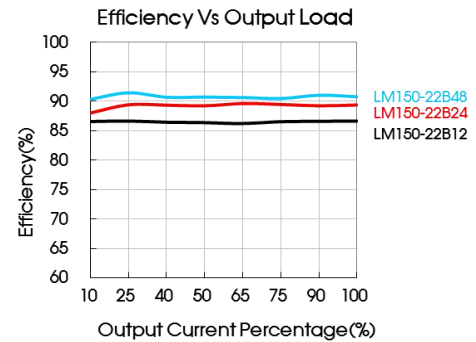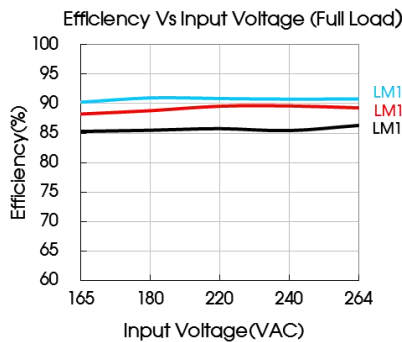


## Dimensions and Recommended Layout


### LM150-22Bxx, LM150-22Bxx-Q Series

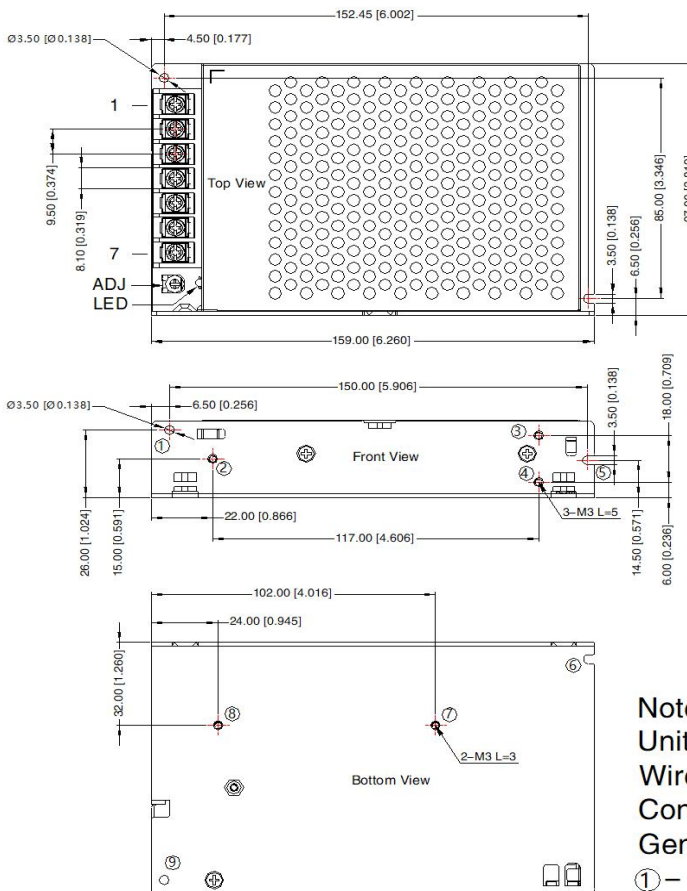

THIRD ANGLE PROJECTION

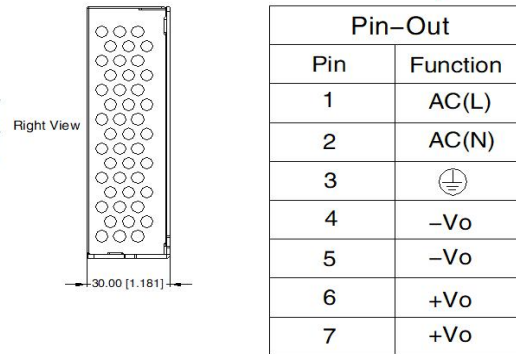


Position	Screw Spec.	L(max)	Torque(max)
② - ④	M3	5mm	0.4N·m
⑦ - ⑧	M3	3mm	0.4N·m

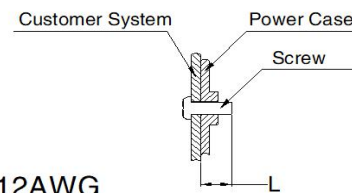


Note:  
Unit: mm[inch]  
Wire range: 22-12AWG  
Connector tightening torque: M3.5, 0.8N·m  
General tolerances:  $\pm 1.00[\pm 0.039]$   
① - ⑨ any position must be connected to PE

LM150-22Bxx-C Series

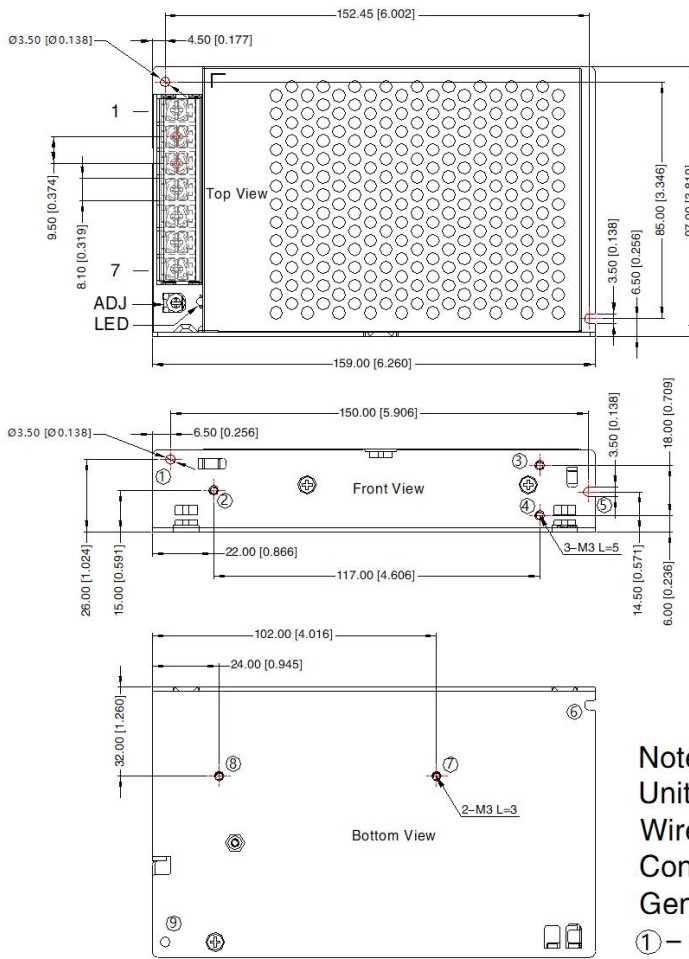


THIRD ANGLE PROJECTION



Pin-Out	
Pin	Function
1	AC(L)
2	AC(N)
3	⊕
4	-Vo
5	-Vo
6	+Vo
7	+Vo

Position	Screw Spec.	L(max)	Torque(max)
② - ④	M3	5mm	0.4N·m
⑦ - ⑧	M3	3mm	0.4N·m

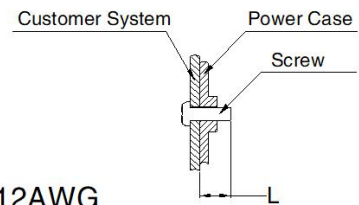

Note:  
Unit: mm[inch]  
Wire range: 22-12AWG  
Connector tightening torque: M3.5, 0.8N·m  
General tolerances: ± 1.00[± 0.039]  
① - ⑨ any position must be connected to PE

Note:

- For additional information on Product Packaging please refer to [www.mornsun-power.com](http://www.mornsun-power.com). Packaging bag number: 58220111;
- Unless otherwise specified, parameters in this datasheet were measured under the conditions of Ta=25°C, humidity<75% RH with nominal input voltage and rated output load;
- The ambient temperature derating of 5°C/1000m is needed for operating altitude greater than 2000m;
- All index testing methods in this datasheet are based on our company corporate standards;
- In order to improve the efficiency at high input voltage, there will be audible noise generated, but it does not affect product performance and reliability;
- We can provide product customization service, please contact our technicians directly for specific information;
- Products are related to laws and regulations: see "Features" and "EMC";
- The out case needs to be connected to PE (⊕) of system when the terminal equipment in operating;
- Our products shall be classified according to ISO14001 and related environmental laws and regulations, and shall be handled by qualified units;
- The power supply is considered a component which will be installed into a terminal equipment. All EMC tests should be confirmed with the final equipment. Please consult our FAE for EMC test operation instructions.

Mornsun Guangzhou Science & Technology Co., Ltd.

Address: No. 5, Kehui St. 1, Kehui Development Center, Science Ave., Guangzhou Science City, Huangpu District, Guangzhou, P. R. China  
Tel: 86-20-38601850 Fax: 86-20-38601272 E-mail: info@mornsun.cn www.mornsun-power.com